


RESIDENTIAL EXTRACTOR FANS

VENTILATION FOR THE HOME




iCONsmart®



iCONsmart 15 iCONsmart 30

- 2 size model range with flow rate up to 42 l/s (151 m³/h)
- Sleek and stylish
- Designed to be recessed into the ceiling or wall
- Range of plugin multi-function modules that fit in all fan sizes
- IPX5
- Bluetooth, App controlled
- Real time usage data available
- Silent shutter prevents backdraught/noise ingress
- Cantilever lugs to facilitate uneven surfaces
- Meets building regulations requirements
- 5 year warranty

Model	Part No.	Micro Modules	Part No.
iCONsmart 15	72687221	Timer	72687224
iCONsmart 30	72687222	Humidity & Timer	72687225
		Motion Sensor & Timer	72687226
		Motion Sensor with Humidity & Timer	72687227



TIMER
UNLOCK CODE

HUMIDITY & TIMER

MOTION SENSOR & TIMER

MOTION SENSOR WITH HUMIDITY & TIMER

iCON®



iCON 15 iCON 30 iCON 60


- 3 size model range with a flow rate up to 75 l/s (270 m³/h)
- Interchangeable control modules match fan to installation requirements
- Can be surface mounted or recessed
- Red Dot Design Award winning silent iris shutter prevents backdraughts
- A range of coloured covers available
- IPX4 rating
- SELV versions available
- Meets building regulations requirements
- 3 year warranty

Model	Part No.	SELV Modules	Part No.
iCON 15	72683501	Pull cord	72573603
iCON 30	72591601	Pull cord, Timer	72574204
iCON 60	72591701	Humidity, Timer, Pullcord	72574202
iCON 15S	72683701	Motion, Timer	72574203
iCON 30S	72683801	Motion, Humidity, Timer	72574201

240V Modules	Part No.
Pull cord	72573602
Timer	72612601
Humidity, Timer,	72687103
Motion Sensor, Timer	72687104
Motion, Humidity, Timer	72687102



iCONstant®




- Flow rate up to 22 l/s (72 m³/h)
- Continuously running fan
- Quietest dMEV fan available – noise levels from 10dB(A)
- Timer, Humidity Timer controls
- Guaranteed constant volume feature
- Only dMEV fan with IPX5 rating for walls and ceilings
- Complies with Building Regulations
- Recognised in SAP PCDB*
- 3 year warranty

*iCONstant flex Models only.

Model	Part No.
iCONstant T	72687117
iCONstant HT	72687118
iCONstant flex T	72687119
iCONstant flex HT	72687120

QuietAir®

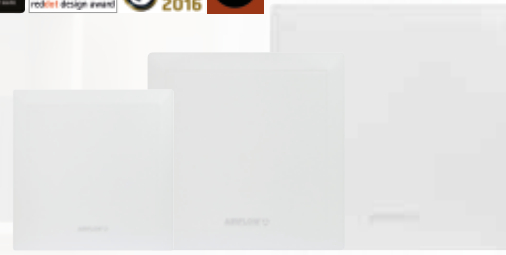

QT100 QT120 QT150

- 3 size model axial fan range with a flow rate up to 72 l/s (260 m³/h), 100 (4"), 120 (5"), 150 mm (6")
- Available with Timer, Humidity Timer, Motion Sensor
- Sound levels from only 25 dB(A) for 15 l/s delivered performance
- Very low SFP and power consumption
- Integral flow straightener makes it ideal for longer duct runs
- IP45 rating
- Meets building regulations flow rate requirements
- The Quietest fan, beware of imitations*
- 3 year warranty

Model	Part No.
QuietAir QT100B	9041259
QuietAir QT100T	9041260
QuietAir QT100HT	9041261
QuietAir QT100MST	9041262
QuietAir QT120B	9041497
QuietAir QT120T	9041498
QuietAir QT120HT	9041499
QuietAir QT120MST	9041500
QuietAir QT150B	90000454
QuietAir QT150T	90000455
QuietAir QT150HT	90000456
QuietAir QT150VS	90000458

*On both speeds, the QuietAir100 unlike other silent fans on the market, complies with current Building Regulations Part F and Part L plus it meets the installed performance requirements when ducted as per the Domestic Ventilation Compliance Guide with class leading energy levels for toilet, bathroom, utility and kitchen extraction.

EXTRACT & REPLACE

The air in your home comes in from outside through trickle vents in the windows, air bricks, leaky flooring and loft hatches and all the cracks and holes in the fabric of the building.

Once inside, air circulates around the dwelling collecting pollutants on the way through open doors or through the gap under the door when they are shut. It is worth noting that a 10 mm gap above the finished floor covering is required by the latest Building Regulations.

This polluted air is then removed from the toilet, bathroom, en-suite, utility room or kitchen by an extractor fan. For effective extraction to take place it is important that, even in a well sealed dwelling, there is sufficient air coming in to replace the air lost through extraction.

Aventa In-Line



- Flow rate up to 78 l/s (280 m³/h)
- Powerful 2 speed, in-line mixed flow fans
- High pressure, low noise
- Basic and Timer versions available
- Available as a shower kit with LED
- Access to motor and impeller without dismantling ducting
- IPX4 rating
- 3 year warranty

SHOWER KIT AVAILABLE



Model	Part No.
Aventa 100B	9041085
Aventa 100T	9041086
Aventa 125B	9041087
Aventa 125T	9041088
Aventa 150B	9041089
Aventa 150T	9041090
Aventa 100T shower kit	9041407
Aventa 100T shower kit with light	9041408
Aventa 125T shower kit with light	9041406

Model	Part No.
Aventa 100 Silent	90000358
Aventa 125 Silent	90000359
Aventa 150 Silent	90000360
Aventa 200 Silent	90000361

Maxivent eco



- High performance fan up to 72 l/s (260 m³/h)
- Axial fan
- Pull Cord, Timer and Humidity versions available
- Interchangeable fixing holes to easily replace most other 150 mm fans
- Auto shutter
- Variable speed controller available
- Can be mounted in the wall or ceiling
- IPX4 rating. Complies with Building Regulations
- 3 year warranty

Model	Part No.
Maxivent eco P	72678201
Maxivent eco T	72678301
Maxivent eco H	72678401

LOOVENT eco



- Smallest 30 l/s (110 m³/h) fan in its class
- Two speed centrifugal fan
- Well proven filterless technology
- Good for longer ducts
- Can be surface mounted or recessed in portrait or landscape, wall or ceiling
- Available with Timer, Humidity Timer, Motion Sensor controls and dMEV version
- SELV versions available
- Economical to operate - uses from only 3.6 W
- IPX5 rating
- 5 year warranty

Model	Part No.
LOOVENT eco T dMEV	72684308
LOOVENT eco HT dMEV	72684311
LOOVENT eco T dMEV SELV	72684312
LOOVENT eco HT dMEV SELV	72684313

Model	Part No.
LOOVENT eco T	72684305
LOOVENT eco HT	72684306
LOOVENT eco MST	72684307
LOOVENT eco T SELV	72684309
LOOVENT eco HT SELV	72684310

Aura / Aria



- Ventilation with flow rates up to 65 l/s (235 m³/h) (available in 100 (4"), 125 (5"), 150 mm (6"))
- Axial fan
- Basic, Pull Cord, Humidity Timer, Motion Sensor Timer versions available
- Quiet version available
- Wall and ceiling mounting
- Entry level ventilation solution
- Rating: Aura and Aria IPX4, Aria Quiet IP45
- 3 year warranty

Model	Part No.	Model	Part No.
Aura eco 100B	9041347	Aria 100B	90000687
Aura eco 100T	9041348	Aria 100PC	90001400
Aura eco 100HT	9041349	Aria 100T	90000688
Aura eco 100MST	9041350	Aria 100HT	90000689
Aura eco 125B	90000532	Aria 100MST	90000690
Aura eco 125T	90000533	Aria Quiet 100B	90001047
Aura eco 125HT	90000534	Aria Quiet 100T	90001048
Aura eco 125MST	90000535	Aria Quiet 100HT	90001050
Aura eco 150B	9041351	Aria Quiet 100MST	90001051
Aura eco 150T	9041352		
Aura eco 150HT	9041353		
Aura eco 150MST	9041354		

AIRFLOW

UNITED KINGDOM (head office)
Airflow Developments Limited
Aidelle House, Lancaster Road
Cressex Business Park,
High Wycombe, Bucks, HP12 3QP.

Tel: +44 (0) 1494 525252
Email: info@airflow.com
Web: airflow.com

